

TIE DOWN KIT

USER GUIDE



Adult installation required

Read User Guide before installation

Please keep this guide for further reference

SUPER TRAMP
Part of the Family - Est 1983

Tel: +44 (0)1884 675801 | www.supertramp.co.uk | sales@jetsports.co.uk

Before You Begin



IMPORTANT:

Important: Before installing your tie down kit, please make sure there are no concealed underground utilities (such as water, electricity, phone) which could be encountered during installation.

WARNING:

- Please note that the anchors will protrude from the ground so caution must be exercised at all times around the trampoline perimeter.
 - If you come into contact with an anchor through a trip or fall, for example, this could cause injury so adult supervision is recommended at all times.
 - Jet Sports Ltd do not state, grant or imply guarantees as to the performance of this anchor kit in any application whatsoever.
-


NOTE:

To mow the lawn under and around the trampoline, simply detach the straps from the in-ground stake and move your trampoline accordingly. Be aware that the stakes will protrude from the ground so you will need to mow around these. Once finished, move your trampoline back to its original position and reattach the straps to the stakes.


STEP

1

As demonstrated in the diagram to the right, take the tie strap and wrap this around the leg base and top frame and clip it together. Pull the strap tight to eliminate any slack.

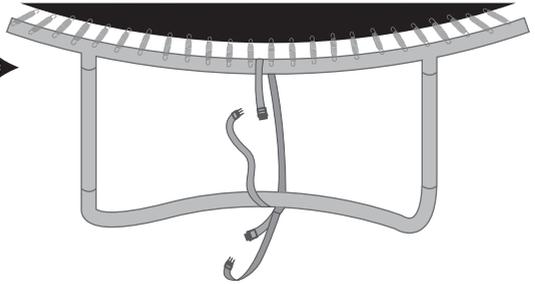

N.B.: On some trampoline models the strap may not be long enough to wrap around both the top frame and the leg base. In any case, secure the strap around the top frame only.

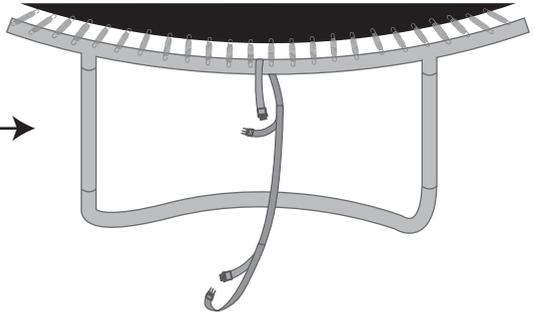



STEP

2


Position each stake at the centre point of each leg base.

Proceed to secure it into the ground by applying force in a downward motion whilst rotating the stake.

If the ground is particularly hard, you may need to soften it beforehand using water. If you find there is a lot of resistance, we recommend using a rod of some description to act as a handle and improve grip on the stake.

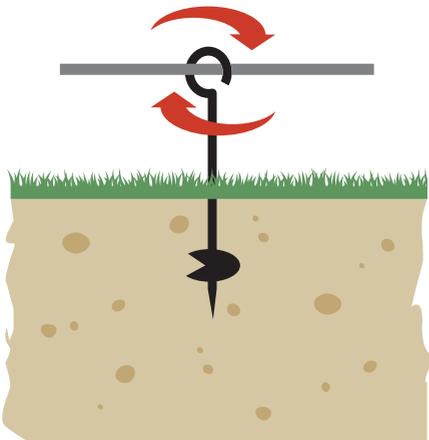


Continue to rotate the stake into the ground until the bottom of the 'eye' is approximately 1" from the ground.

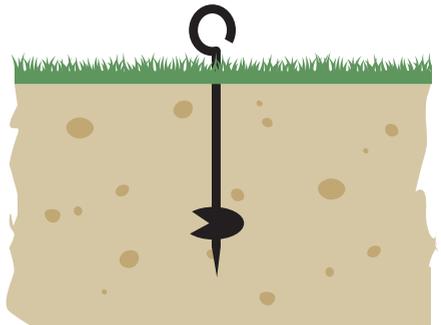

STEP

3

Thread the end strap of the tie strap through the eye of the stake.

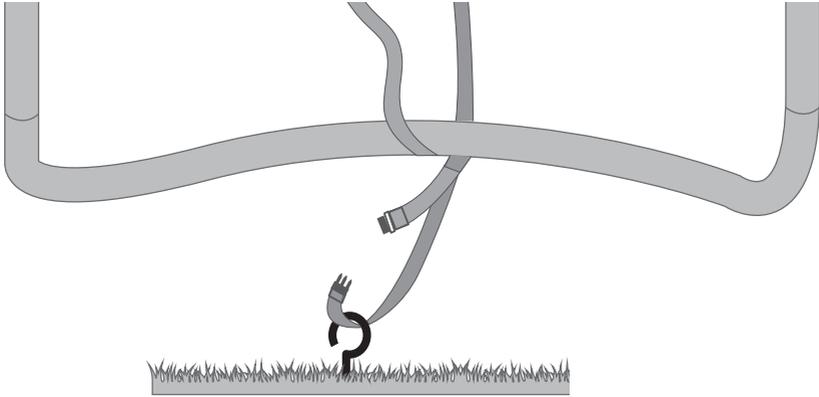

STEP

4

Clip the straps together and pull tight. Please note that the open end of the eye should be facing away from the trampoline (see diagram).

